3040-W

Pulsante anti panico con memoria a LED.

The Sentrol 3040/3050 series Panic Switch activates the alarm output when the user pulls the actuating lever. On the 3040 model, an external LED lights and latches, indicating that the alarm circuit has been activated. The lever is closed first to rearm the alarm switch, then the latching LED circuit is reset externally at the control panel. The 3045 model has no LED or latching circuit. The 3050 model feature a glowing LED for low light visibility. The LED glows green when powered up, turns red upon activation. The 3050 also contains a latching LED.



Applications

Mounted out of sight but within easy reach for manual activation, such as under desks or counters in banks, jewelry stores and other facilities where people or property are at risk. The 3045 model can be used in residential installations when a panic switch is needed. Models with the LED and latching circuit can be used in commercial and high risk applications.

Dettagli

- Mounts underneath or on side of desk or counter
- Smooth housing prevents accidental damage to clothing
- Actuating lever designed to accommodate only tip of finger
- Reed contact resets when lever is in closed position
- Version with latching LED available

3040-W

Pulsante anti panico con memoria a LED.

Specifiche tecniche

Generale

Tipo	Interruttore
Resistente all'acqua	No
LED	Si
Circuito Led memorizzato	Si
Contatto allarme	SPDT
Indicazione allarme	Red LED
Connessioni	Screw terminals

Cablato / senza fili

Cablato / senza fili	Cablato

Elettrico


Valore di alimentazione	7 to 15 VDC
Consumo attuale	8 mA

Fisico

Dimensioni fisiche	74 x 45 x 19 mm (L x W x H)
Colore	Bianco

Ambientale

Temperatura operativa	-18 to +43°C

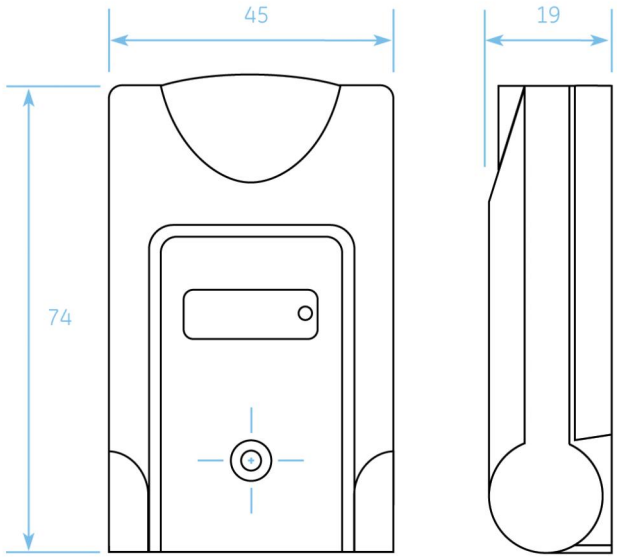

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 17 April 2025 - 17:34