
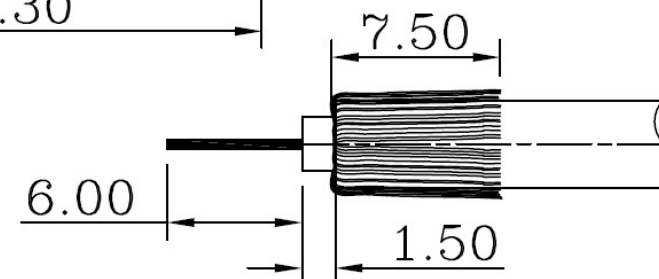
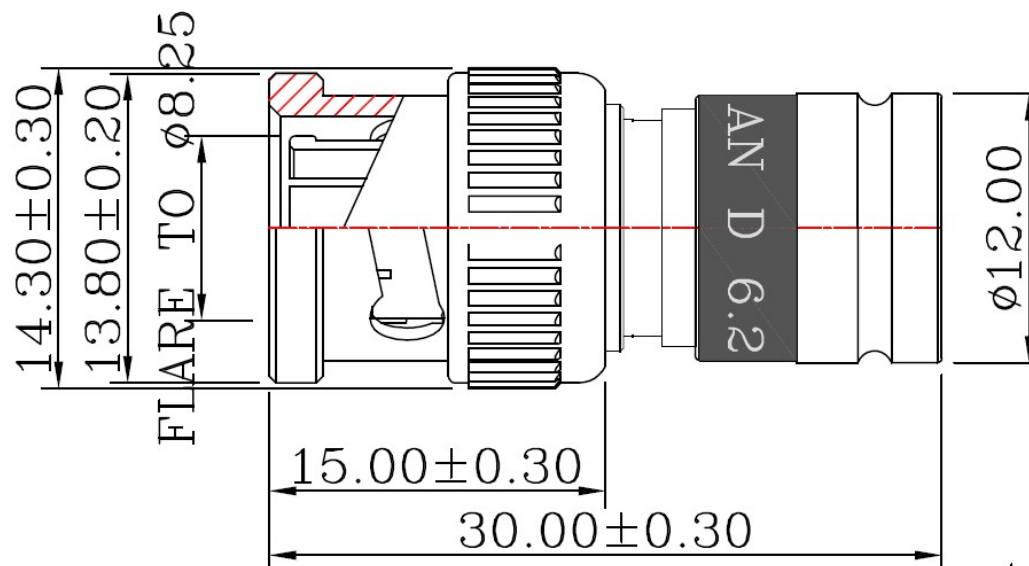


ROHS Compliant

408030C



RECOMMENDED
CABLE STRIPPING DIM'S

12	PASTER	--	1	BLACK
11	COVER	BRASS	1	NICKEL PLATED
10	GASKET	RUBBER	1	RED
9	WASHER	IRON	1	NICKEL PLATED
8	SPRING	65Mn	1	NATURAL
7	WASHER	IRON	1	NICKEL PLATED
6	INSULATOR	POM	1	NATURAL
5	CENTER CONTACT	Be,Cu	1	TIN PLATED
4	CONTACT PIN	BRASS	1	GOLD PLATED
3	INSULATOR	TEFLON	1	WHITE
2	BODY	BRASS	1	NICKEL PLATED
1	SHELL	BRASS	1	NICKEL PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

REVISIONS				
RevNo	Description	Date	Revision	Mender
1	Black band add ELAN D6.2 stamped	2016-5-5	A2	C M
2	Change recommended cable stripping dia. to 7.5mm	2016-5-12	A3	C M

ELAN SRL Via Osimana 70 - Camerano (AN)				TITLE BNC COMPRESSION PLUG M6.2(COAX RG59.)		
DRAWING NO.		UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00	DESIGNED	Y S
		SCALE	FIT		DRAWING	Y S
MODEL NO.	SB016/1C20Z25Ad1K0B4			PUBLISH DATE	CHECKED	C M
PART NO.			EDITION		APPROVED	A A
CAD FILE				2016-03-10	3RD ANGLE	