
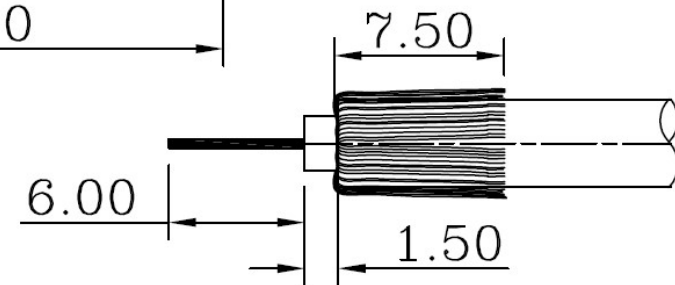
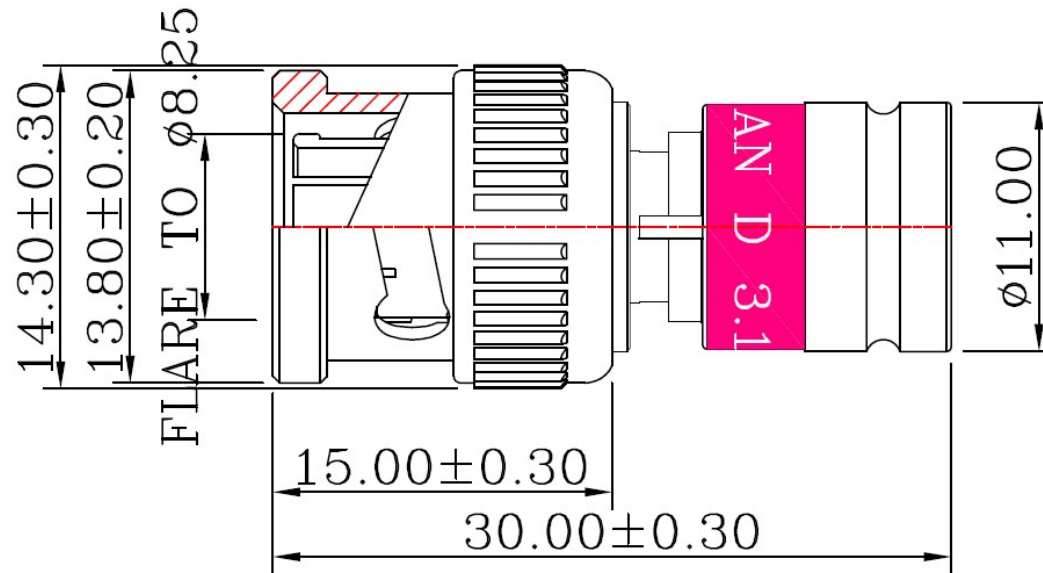


ROHS Compliant

408015C



RECOMMENDED
CABLE STRIPPING DIM'S

12	PASTER	--	1	RED
11	COVER	BRASS	1	NICKEL PLATED
10	GASKET	RUBBER	1	RED
9	WASHER	IRON	1	NICKEL PLATED
8	SPRING	65Mn	1	NATURAL
7	WASHER	IRON	1	NICKEL PLATED
6	INSULATOR	POM	1	NATURAL
5	CENTER CONTACT	Be,Cu	1	TIN PLATED
4	CONTACT PIN	BRASS	1	GOLD PLATED
3	INSULATOR	TEFLON	1	WHITE
2	BODY	BRASS	1	NICKEL PLATED
1	SHELL	BRASS	1	NICKEL PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

ELAN SRL Via Osimana 70 - Camerano (Ancona)				TITLE BNC COMPRESSION PLUG M3.1(Micro coax.)		
		UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 ANGLES 15-30 = ±0.30 ±5° 30-120 = ±0.60 >120 = ±1.00	DESIGNED	Y S
DRAWING NO.		SCALE	FIT		DRAWING	Y S
MODEL NO.	SB016-M3.1				CHECKED	C M
PART NO.		EDITION	A1		APPROVED	A A
CAD FILE				2015/10/15	 3RD ANGLE	

REVISIONS				
RevNo	Description	Date	Revision	Mender
1	Add Extra Insulator	2015-12-21	A2	CM
2	Change Neck frame	2016-01-28	A3	CM
3	Red band add ELAN D 3.1 stamped	2016-05-05	A4	CM
4	Change recommended cable stripping dia. to 7.5mm	2016-05-12	A5	CM