

4K Mini Fixed Bullet Network Camera

IPC2128SR3-DPF40(60)



Key Features

Optics

- Day/night functionality
- Smart IR , up to 30 m (98 ft) IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D DNR (Digital Noise Reduction)
- Day/night functionality
- Up to 120 dB WDR (Wide Dynamic Range)

Compression

- Ultra 265,H.265, H.264, MJPEG
- Embedded smart algorithm
- Triple streams
- 9:16 corridor format

Network

- ONVIF Conformance

Structure

- Wide temperature range: -30°C to 60°C (-22°F to 140°F)

Wide voltage range of $\pm 25\%$

IP67


3-Axis

Specifications

	IPC2128SR3-DPF40				IPC2128SR3-DPF60		
Camera							
Sensor	1/2.5", 8.0 megapixel, progressive scan, CMOS						
Lens	4.0mm@ F2.0				6.0mm@ F2.0		
DORI Distance	Lens	Detect(m)	Observe(m)		Recognize(m)	Identify(m)	
	4.0mm	72	28.8		14.4	7.2	
	6.0mm	108	43.2		21.6	10.8	
Angle of View(H)	91.6°				54.2°		
Angle of view(V)	47.2°				32.5°		
Angle of view(O)	112.7°				66.7°		
Adjustment Range	Pan: 0°~360°		Tilt: 0° ~ 90°		Rotation: 0° ~ 360°		
Shutter	Auto/Manual, 1~1/100000 s						
Minimum Illumination	Colour: 0.001 Lux (F2.0, AGC ON) 0 Lux with IR on						
Day/Night	IR-cut filter with auto switch (ICR)						
Digital noise reduction	2D/3D DNR						
S/N	>52dB						
IR Range	Up to 30m (98 ft) IR range						
Defog	Digital Defog						
WDR	120dB						
Video							
Video Compression	Ultra 265,H.265, H.264, MJPEG						
H.264 code profile	Baseline profile, Main Profile, High Profile						
Frame Rate	Main Stream:8MP (3840*2160): Max. 15 fps , Sub Stream:1080P (1920*1080): Max. 30 fps; Third Stream:D1(720*576) : Max. 30 fps						
9:16 Corridor Mode	Supported						
HLC	Supported						
BLC	Supported						
OSD	Up to 8 OSDs						
Privacy Mask	Up to 8 areas						
ROI	Up to 8 areas						
Motion Detection	Up to 4 areas						
Smart							
Behavior Detection	Intrusion, cross line, motion detection						
Intrusion	Enter and loiter in a pre-defined virtual region						
cross line	Cross a pre-defined virtual line						

motion detection	Moving within a pre-defined virtual region
Recognition	Face detection
Intelligent Identification	Defocus, Scene Change, Object Left, Object Moving
Statistical Analysis	People counting
General Function	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL
Compatible Integration	ONVIF(Profile S, Profile T), API
Interface	
Network	1 RJ45 10M/100M Base-TX Ethernet
General	
Power	12 V DC±25%, PoE (IEEE802.3 af)
	Power consumption: Max 8 W
Dimensions (L × W × H)	191.3×72.6×70.9mm (7.5"×2.9"×2.8")
Weight	0.5 kg (1.1 lb)
Working Environment	-30°C ~ 60°C (-22° F ~ 140° F), Humidity : 10%~90% RH(non-condensing)
Ingress Protection	IP67

Dimensions

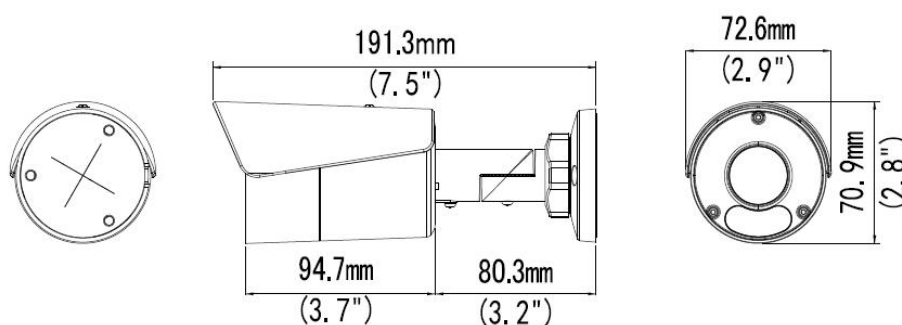

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2018 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.