

## NVR301-04/08B



### Key Feature

- Support Ultra 265/H.265/H.264 video formats
- 4/8-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 2MP resolution recording
- 1 SATA HDD up to 10 TB
- Support cloud upgrade

### Specifications

| Model                | NVR301-04B                                                                                                                                                                                                        |  | NVR301-08B |  |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------|--|
| Video/Audio Input    |                                                                                                                                                                                                                   |  |            |  |
| IP Video Input       | 4-ch                                                                                                                                                                                                              |  | 8-ch       |  |
| Network              |                                                                                                                                                                                                                   |  |            |  |
| Incoming Bandwidth   | 40Mbps                                                                                                                                                                                                            |  |            |  |
| Outgoing Bandwidth   | 40Mbps                                                                                                                                                                                                            |  |            |  |
| Remote Users         | 128                                                                                                                                                                                                               |  |            |  |
| Protocols            | P2P, UPnP, NTP, DHCP, PPPoE                                                                                                                                                                                       |  |            |  |
| Video/Audio Output   |                                                                                                                                                                                                                   |  |            |  |
| HDMI/VGA Output      | HDMI:<br>1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz<br>VGA:<br>1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz |  |            |  |
| Recording Resolution | 1080p/960p/720p/D1/2CIF/CIF                                                                                                                                                                                       |  |            |  |
| Synchronous Playback | 4-ch                                                                                                                                                                                                              |  | 8-ch       |  |
| Corridor Mode Screen | 3/4                                                                                                                                                                                                               |  | 3/4/5/7/9  |  |

## Decoding

|                   |                             |
|-------------------|-----------------------------|
| Decoding format   | Ultra 265/H.265/H.264       |
| Liveview/Playback | 1080p/960p/720p/D1/2CIF/CIF |
| Capability        | 4 x 1080p@20, 4 x 720p@30   |

## Hard Disk

|          |                          |
|----------|--------------------------|
| SATA     | 1 SATA interface         |
| Capacity | up to 10TB for each disk |


## External Interface

|                   |                                                  |
|-------------------|--------------------------------------------------|
| Network Interface | 1 RJ45 10M/100M self-adaptive Ethernet Interface |
| USB Interface     | Front panel: 1 x USB2.0; Rear panel: 1 x USB2.0  |


## General

|                      |                                                                |
|----------------------|----------------------------------------------------------------|
| Power Supply         | 12V DC<br>Power Consumption: ≤3.2 W (without HDD)              |
| Working Environment  | -10°C~+55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing) |
| Dimensions (W×D×H)   | 260mm × 240mm × 44mm (10.2"×9.4"×1.7")                         |
| Weight (without HDD) | 0.9kg (1.98lb)                                                 |

## Dimensions

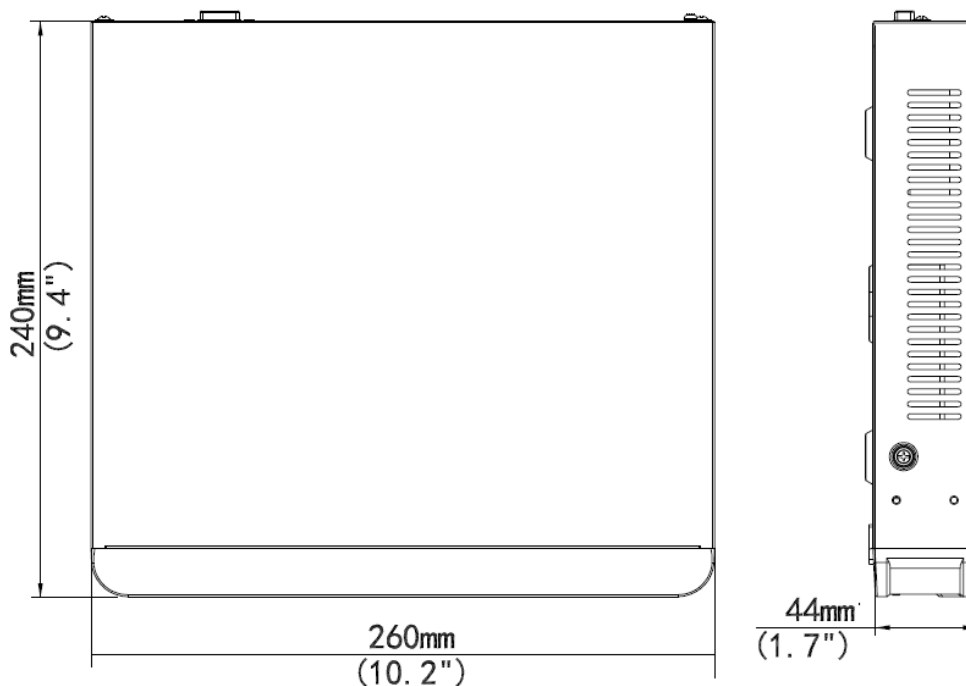

## Rear Panel

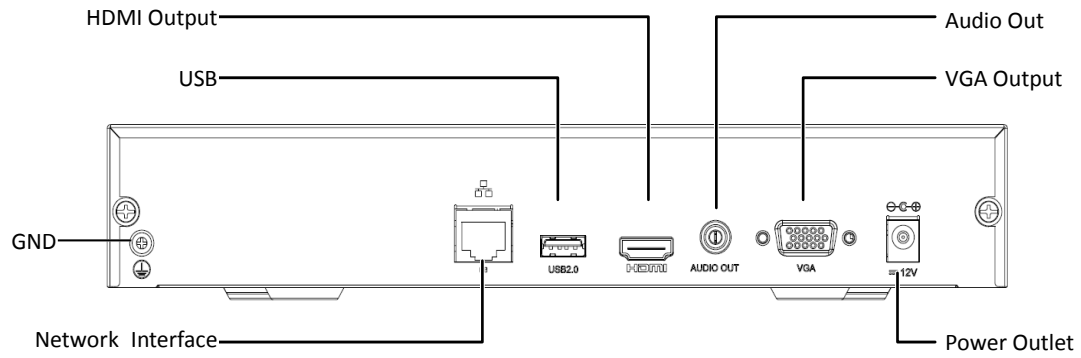

## Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2018 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\* Product specifications and availability are subject to change without notice.