

FE323-N


Serratura magnetica 2430N montaggio standard.

Mega-LED

This electromagnet is part of the new series of magnetic locks equipped with a "Mega-LED" allowing to see the LED status from a much further distance.

Security, quality and design

Security, safety and design using high quality materials, ensuring maximum strength without any residual magnetism or corrosion and proven holding force.

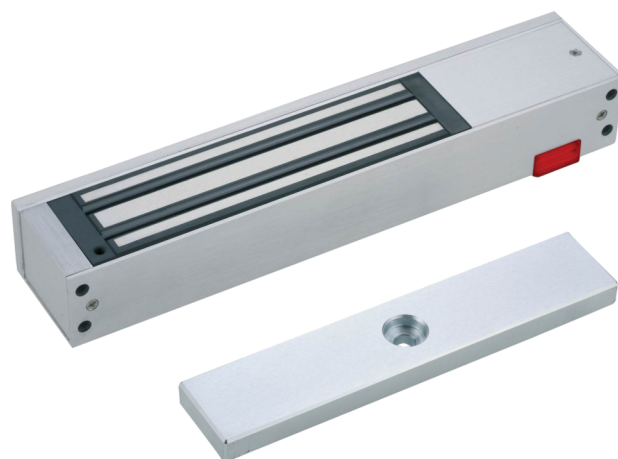

Details

- Strong design with high-end finish
- Corrosion proof: salt spray test (ISO 9227, ASTM B 117-90) at 35% for 96 hours
- No residual magnetism
- Built-in MOV surge protection
- L bracket and Z + L bracket set available

FE323-N

Serratura magnetica 2430N montaggio standard.

Technical specifications

Generale

Tipo prodotto	Serrature magnetiche
---------------	----------------------

Tenuta

Forza di tenuta kgf (Forza al kilogrammo)	243
Forza di tenuta N (Newton)	2430

Monitoraggio e stato

Monitorati	Si
Indicatore LED	Si
Interruttore stato porta	No

Elettrico

Tensione di esercizio	12/24 V
Consumo attuale	500/250 mA

Fisico

Dimensioni fisiche	238 x 26 x 48 mm
Peso netto	~ 2 kg
Colore	Alluminio

Ambientale

Temperatura operativa	-40° to +60°C
-----------------------	---------------

Main features

Mounting	Surface
Locking monitoring	Large L shaped LED for long distance status + Relay
Door position monitoring	No
Corrosion Proof	Salt spray test. ISO 9227, ASTM B-117 90
Residual magnetism	Guaranteed no residual magnetism
Built-in MOV Surge Protection	Yes

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 19 March 2020 - 15:01

