

Network Video Recorder

NVR302-S2-P Series




Key Features

- Support Ultra265/H.265/H.264 video formats
- 8/16-channel input
- Plug & Play with 8/16 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 10TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications


Model	NVR302-08S2-P8		NVR302-16S2-P16	
Video/Audio Input				
IP Video Input	8-ch		16-ch	
Two-way Audio Input	1-ch, RCA			
Network				
Incoming Bandwidth	80Mbps		160Mbps	
Outgoing Bandwidth	64Mbps			
Remote Users	128			
Protocols	P2P, UPnP, NTP, DHCP, PPPoE			
Video/Audio Output				
HDMI/VGA Output	HDMI: 4K (3840x2160@30), 1920X1080@60, 1920X1080@50, 1600X1200@60, 1280X1024@60, 1280X720@60, 1024X768@60 VGA: 1920X1080@60, 1920X1080@50, 1280X1024@60, 1280X720@60, 1024X768@60			
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Audio Output	1-ch, RCA			
Synchronous Playback	8-ch		16-ch	
Corridor Mode Screen	3/4/5/7/9		3/4/5/7/9/10/12/16	
Decoding				
Decoding format	Ultra265/H.265/H.264			
Live view/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF			
Capability	2 x 4K@30, 4x 4MP@30, 5 x 3MP@30, 8 x 1080P@30		2 x 4K@30, 4x 4MP@30, 5 x 3MP@30, 8 x 1080P@30, 16 x 720P@30	
Hard Disk				
SATA	2 SATA interfaces			
Capacity	Up to 10TB for each disk			
External Interface				
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface			
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0			
Alarm In	4-ch			
Alarm Out	1-ch			
PoE				
Interface	8 RJ-45 10M/100M self-adaptive Ethernet Interface		16 RJ-45 10M/100M self-adaptive Ethernet Interface	
Max Power	Max 30W for single port Max 130W in total		Max 30W for single port Max 240W in total	
Supported Standard	IEEE 802.3af/at			
General				
Power Supply	100 ~ 240 V AC Power Consumption: ≤10W(without HDD)			
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)			
Dimensions (W×D×H)	380mm ×315mm × 53mm (14.9" × 12.4" ×2.1")			
Weight (without HDD)	≤2.6kg (5.73lb)			

Dimensions

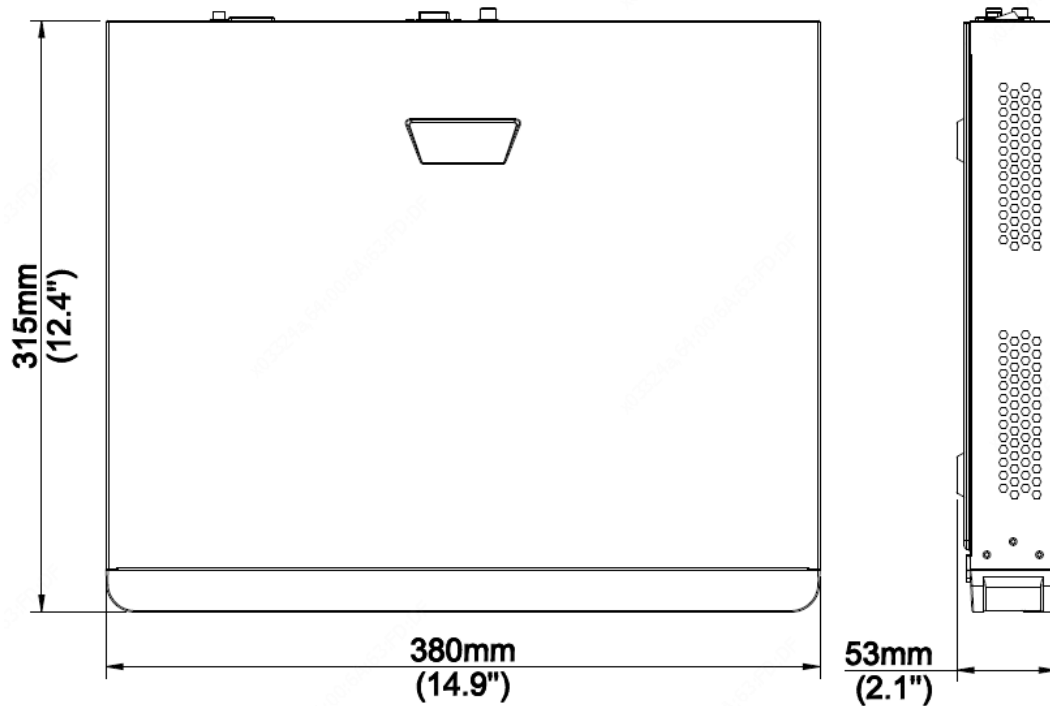

Rear Panel

Take **NVR302-08S2-P8** for example

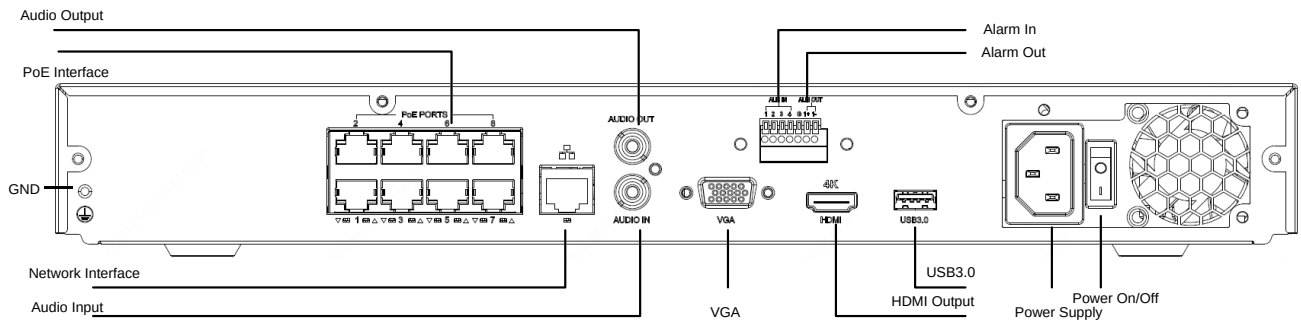

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://sgcdn.uniview.com>

©2020 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.