

ES2402-8P-2C-V3

8-Port Fast Ethernet Web Smart Switch POE-AT with 2 x Gigabit Uplinks

Overview

The IFS ES Series of Web Smart PoE+ Switches are designed to be a cost-effective network switch solution for small to mid sized IP camera surveillance systems. The switches are available in 8-, 16- or 24-port Fast Ethernet PoE+ configurations with all versions having two additional GigE RJ45/SFP ports. Allowing for basic management and PoE functionality, the switches meet the basic need of providing Fast Ethernet ports for IP cameras with GigE ports for NVR/Server connections.

The IFS ES Series of Web Smart Switches support basic Layer 2 features, such as VLANs, QoS, Link Aggregation, Port Mirroring, Spanning Tree, IGMP Snooping and basic security. In addition, these switches provide both IEEE802.3-af/at power on each port (up to the maximum total power budget) and offer full PoE management features. With a unique PoE usage LED meter on the front panel, these switches allow users to monitor total power budget usage without having to connect to a PC.



Details

- 8-Port 10/100 Mbps Fast Ethernet ports with PoE-AT
- Up to 250m (with PoE) 10-BaseT mode
- 2x 10/100/1000 Mbps TP combo interfaces and 2 mini-GBIC/SFP slots (100/1000)
- Easy web-based management
- PD Alive Checking
- Supports auto-negotiation and half-duplex/full-duplex modes for all 10Base-T/100Base-TX and 1000Base-T ports
- Security Control: MAC Address binding and TCP & UDP filtering
- QoS support: allows to assign low / high priority on each port
- IGMP snooping for better control of multicast streams
- Port mirroring to monitor the incoming or outgoing traffic on a particular port
- Complies with IEEE 802.3at Power over Ethernet
- Supports up to 8 POE-af devices or 4 POE-at devices at full power
- Up to 120 W total POE power

ES2402-8P-2C-V3

8-Port Fast Ethernet Web Smart Switch POE-AT with 2 x Gigabit Uplinks

Technical specifications

Generale

Storm control	Broadcast
Sicurezza	MAC address binding, TCP/UDP filtering
DHCP snooping	Si

Categoria

Categoria	Commerciale
Gestione	Web Smart
Managed	Si (Layer 2)
PoE	Si

Porte fisiche

No. of ports	8
Tipo porta	8 Fast 2 Gig (shared with SFP)
Speed	Veloce
PoE/PoE+	8 Port PoE/4 Port PoE+
Porta fibra	2 (shared)
Supporto SFPs	S2x and S3x series, S30/S35 series
Velocità SFP	100/1000

Caratteristiche Switch

Cambia tessuto	5.5 Gbps
Throughput (Mpps)	4.17
Mac table	16 K
Jumbo frame support	10 K

Funzioni di livello 2

Management interface	Web
IGMP snooping	255 Group, Snooping v1, v2, v3
IGMP query	Without Query supported
VLAN, QoS	30, yes

Elettrico

PoE power budget	120 W
Alimentazione ridondante	No
Tipo di alimentatore	da 100 a 240 VAC
Consumo di energia	160 W (max.)

Fisico

Dimensioni fisiche	280 x 180 x 44 mm
Peso netto	1.6 kg
Colore	Nero
Materiale	Metallo
Tipo di montaggio	Desk-based, Montaggio a rack
Stackable	No

Ambientale


Temperatura operativa	0 to +50°C
Temperatura di immagazzinamento	-10 to +70°C
Umidità relativa	20 to 95% noncondensing
Ambiente	Interno

Standard e norme

Conformità	CE
------------	----

Standards conformance

IEEE 802.3 10Base-T
IEEE 802.3u 100Base-TX
IEEE 802.3z Gigabit SX/LX
IEEE 802.3ab Gigabit 1000Base-T
IEEE 802.3at Power over Ethernet
IEEE 802.3x Flow Control and Back Pressure
IEEE 802.3ad: Port trunk with LACP
IEEE 802.1d Spanning Tree Protocol
IEEE 802.1w Rapid Spanning Tree Protocol
IEEE 802.1p Class of Service
IEEE 802.1Q VLAN Tagging
IEEE 802.1x Port Authentication Network Control

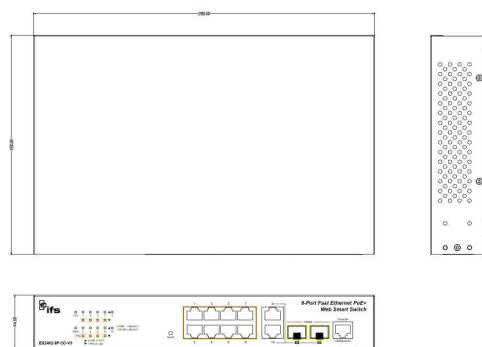

In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.