

# AS376

## Sirena di allarme, multitono da esterno ad alta potenza, IP66

### General

---

The AS376 is a high output electronic sounder for fire alarm applications. It offers a IP66 rating, which makes it ideal for outdoor applications. It also features a special base containing all wiring connections and allow for easy removal/placement of the sounder. To allow for even more flexibility, the user can select between 64 tones and also have the option of a 3rd stage tone.

### Easy and Fast Installation

---

The AS376 sounder allows faster installation and maintenance thanks to an innovative mounting base. Connections are made to the base during the initial wiring phase, which results in faster and more reliable installation. In addition, the head clicks into place and is fixed by four quarter turn fasteners, avoiding the need to screw up four individual screws thus enabling faster installation and accurate seal compression for weatherproofing.


### Efficient and versatile

---

The AS376 provide high sound output at a low current, thus reducing power requirements and system cost. The AS376 sounder is supplied with a volume control as standard, allowing final audio adjustments to be made during installation.

With a choice of 64 different tones (see tones table in manual), which are switch selectable, the required tone can be selected during installation. A second and third tone, is available if extra wires are installed in the sounder circuit.

IP66 as standard, means that the AS376 can be installed in almost any location.

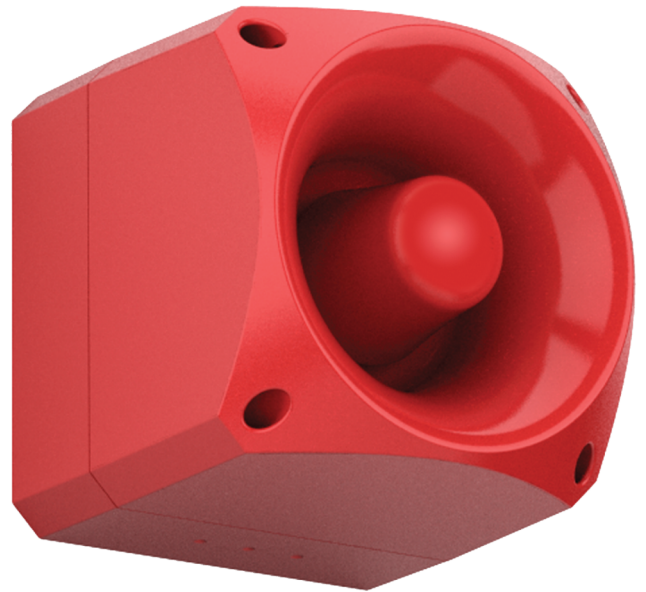

### Dettagli

---

- High sound output
- Low current consumption
- 64 Tones user selectable
- Automatic synchronisation
- Volume control
- Wiring directly to base
- Three stage alarm
- IP66

# AS376

## Sirena di allarme, multitono da esterno ad alta potenza, IP66

### Specifiche tecniche

#### Generale

Monitoraggio linea	Polarised input
--------------------	-----------------

#### Elettrico

Tensione di esercizio	17 - 60 VDC (EN54-3 / fire applications) 10 - 60 VDC (non-fire applications)
-----------------------	---

Consumo attuale	10 - 50mA @ 24 VDC ((see tone table in manual))
-----------------	---

#### Sirena

Livello di uscita	Sound output at 1 m (see tone table in manual): 104 to 116dB(A) @ 24 VDC Continuous operation
-------------------	---

Toni selezionabili	64
--------------------	----

Sincronizzazione	Phased start (automatic)
------------------	--------------------------

#### Fisico

Dimensioni fisiche	166 x 166 x 149 mm (W x H x D)
--------------------	--------------------------------

Peso netto	1100 g
------------	--------

Colore	Rosso
--------	-------

Materiale	Polycarbonato alto impatto
-----------	----------------------------

#### Ambientale

Temperatura operativa	-25 to +70°C
-----------------------	--------------

Ambiente	All'aperto
----------	------------

IP rating	IP66
-----------	------

#### Regolatorio

Certificazioni	EN54-3
----------------	--------



In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita [it.firesecurityproducts.com](http://it.firesecurityproducts.com) online o contatta il tuo riferimento commerciale.

Last updated on 22 July 2025 - 13:39