

DH-PFC200D-9U4D

19" 9U Rack Cabinet



Features

- Aesthetic design
- Standard 19" rack
- Support wall mount and plane mount
- Removable side panel, convenient for construction installation and feature maintenance
- Cable entry on the top cover and bottom panel


Technical Specification

Model	DH-PFC200D-9U4D
General	
Material	SPCC
Dimension (WxDxH)	600mmx450mmx505mm (23.62"x17.72"x19.88")
Mount	Wall mount, plane mount
Weight	15.6kg(34.39lb)
Load Bearing	40kg(88.18lb)
Color	Black
Operating Temperature	-40 °C ~+60 °C (-40 °F ~+140 °F)
Humidity	<90% RH

Ordering Information

Type	Part Number	Description
Cabinet	DH-PFC200D-6U4D	19" 6U rock cabinet, depth 450mm, load bearing 40kg, support wall & plane mount
	DH-PFC200D-9U4D	19" 9U rock cabinet, depth 450mm, load bearing 40kg, support wall & plane mount
	DH-PFC200D-12U4D	19" 12U rock cabinet, depth 450mm, load bearing 40kg, support wall & plane mount
	DH-PFC200D-18U6D	19" 18U rock cabinet, depth 600mm, load bearing 300kg, support wall & plane mount
	DH-PFC200D-42U8D	19" 42U rock cabinet, depth 800mm, load bearing 300kg, support wall & plane mount
Tray	DH-PFC610-4D	19" rackmount tray
	DH-PFC610-6D	19" rackmount tray
	DH-PFC610-8D	19" rackmount tray
PDU	ZZM10/PDU (8 European 250)	8 Outlet rackmount PDU power strip, max. AC250V rated input, 16A/max. 4000W output, European
	ZZM10/PDU (8 British 250)	8 Outlet rackmount PDU power strip, max. AC250V rated input, 13A/max. 3250W output, British
	ZZM10/PDU(8 USA 250)	8 Outlet rackmount PDU power strip, max. AC250V rated input, 10A/max. 2500W output, North American plug input/ universal output
Fan	AA1252MB-AT	Rackmount cooling fan, AC220V input, 2200~2300 RPM
	AA1251MB-AT	Rackmount cooling fan, AC110V input, 2200~2300 RPM

Dimension(mm/inch)

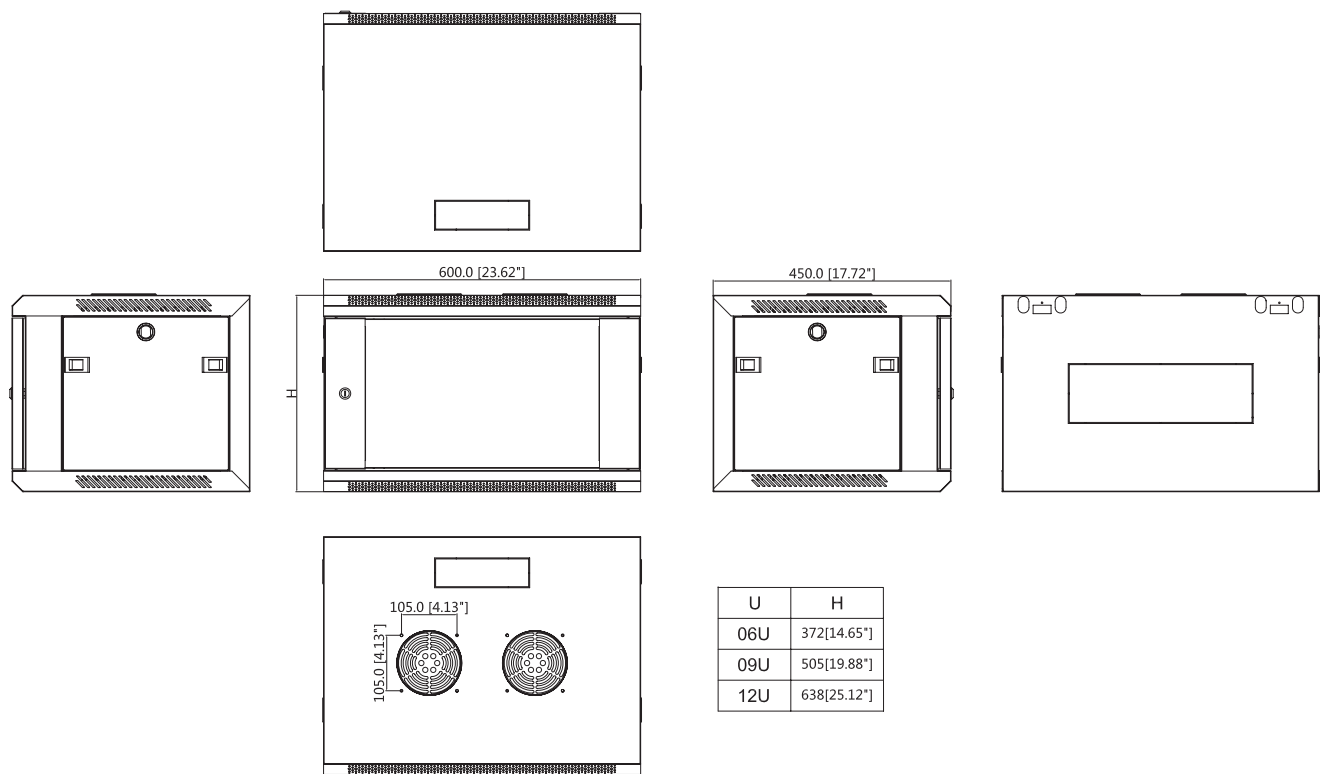

Package Information

- 19" 6U rack cabinet *1
- Wrench *1
- Door key *2
- M6 screw *10