


CDC4-MBC

Intelligent 4-8 Door Controller with 12V PSU motherboard card

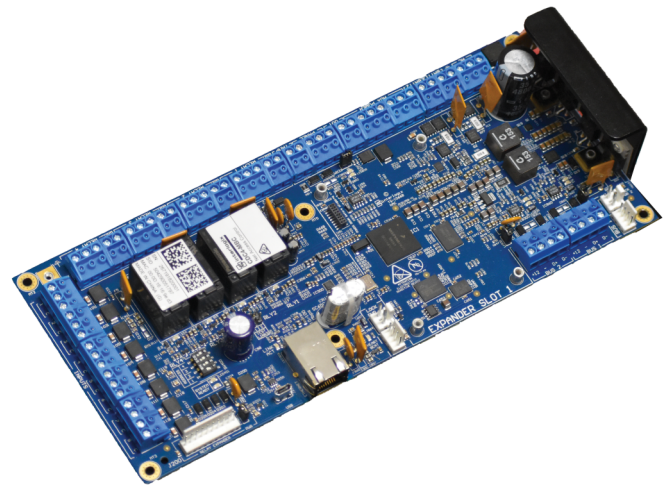

Details

- Real time alarm & access control on 4-8 doors / lifts per controller
- Complete database for offline operation
- Up to 12 CDC4 door controllers providing 48 to 96 intelligent doors
- Any door can be configured as lift: use both together in one controller
- Full access control features: interlocking, user count, high secure users, anti-passback with regions
- Up to 65532 users with card and/or PIN
- Up to 32 readers per CDC4 and 6 per door
- Two local databuses with configurable protocol
- Supporting Secure readers, OSDP readers and wireless locks
- On board inputs, door relays, IP connection and expansion options
- Extended mode operation: access control users managed by Advisor Management
- Anti-passback between all door controllers in standard mode connected to Advisor Advanced

CDC4-MBC

Intelligent 4-8 Door Controller with 12V PSU motherboard card

Technical specifications

Generale

Tipo di espansione	Controllore varchi
Linee prodotto	Advisor Advanced
Tipo di connessione	RS485 (to Advisor Advanced), IP (to Advisor Management)
Compatibilità	Advisor Advanced (not Advisor Master)
Distanza max. dal pannello	1.5 km using advised cable
Max. per panel	Up to 12, depending on intrusion panel
Cavo specificato	WCAT52 / WCAT54 or equivalent

Sistema

Utenti	more than 2000
Codici PIN	All
Gruppi di porte	128 - 50,000
Fusi orari/vacanze	24 - 1000
Indirizzamento	DIP Switches
Resistenza di fine linea	Selectable

Ingressi

Totale	32 for intrusion use
A bordo	8
Espandibile	24 for intrusion use

Uscite

Totale	16 for intrusion use
A bordo	4
Espandibile	8
Tipo di uscite	Relays/Open Collector
Relè	4
Numero massimo di uscite	128
Uscite sirena	1

Backup

Tipo di batteria	Up to 26 Ah Max 18 Ah in housing
Test dinamico	Supported

Elettrico

Consumo di energia	3A at 13.8 VDC
Consumo attuale	251 mA (incl Ethernet)
Alimentatore integrato	Si

Fisico

Dimensioni fisiche	110 x 255 x 48 mm
Housing	No housing

Ambientale

Temperatura operativa	0 to +50°C
Temperatura di immagazzinamento	-20 to +80°C
Umidità relativa	93% noncondensing
Ambiente	Interno

Regulatory

Conformità	CE
Certificazioni	CE



In quanto azienda in continua innovazione, Carrier Fire & Security si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 5 May 2023 - 10:33