

ES2402-16P-2C-V3

16-Port Fast Ethernet Web Smart Switch POE-AT with 2 x Gigabit Uplinks

Overview

The IFS ES Series of Web Smart PoE+ Switches are designed to be a cost-effective network switch solution for small to mid sized IP camera surveillance systems. The switches are available in 8-, 16- or 24-port Fast Ethernet PoE+ configurations with all versions having two additional GigE RJ45/SFP ports. Allowing for basic management and PoE functionality, the switches meet the basic need of providing Fast Ethernet ports for IP cameras with GigE ports for NVR/Server connections.

The IFS ES Series of Web Smart Switches support basic Layer 2 features, such as VLANs, QoS, Link Aggregation, Port Mirroring, Spanning Tree, IGMP Snooping and basic security. In addition, these switches provide both IEEE802.3-af/at power on each port (up to the maximum total power budget) and offer full PoE management features. With a unique PoE usage LED meter on the front panel, these switches allow users to monitor total power budget usage without having to connect to a PC.



Dettagli

- 16-Port 10/100 Mbps Fast Ethernet ports with PoE-AT
- Up to 250 m (with PoE) 10-BaseT mode
- 2x 10/100/1000 Mbps TP combo interfaces and 2 mini-GBIC/SFP slots (100/1000)
- Easy web-based management
- Supports auto-negotiation and half-duplex/full-duplex modes for all 10Base-T/100Base-TX and 1000Base-T ports
- Security Control: MAC Address binding and TCP & UDP filtering
- QoS support: allows to assign low / high priority on each port
- IGMP snooping for better control of multicast streams
- Port mirroring to monitor the incoming or outgoing traffic on a particular port
- Complies with IEEE 802.3at Power over Ethernet
- Supports up to 16 POE-af devices or 8 POE-at devices at full power
- Up to 240 W total POE power

ES2402-16P-2C-V3

16-Port Fast Ethernet Web Smart Switch POE-AT with 2 x Gigabit Uplinks

Specifiche tecniche

Generale

Controllo della tempesta	Broadcast
Sicurezza	MAC address binding, TCP/UDP filtering
Snooping DHCP	No

Categoria

Categoria	Commerciale
Gestione	Web Smart
Gestito	Si (Layer 2)
PoE	Si

Porte fisiche

No. di porte	16
Tipo porta	16 Fast / 2 Gig (shared with SFP)
Velocità	Veloce
PoE / PoE+	16 Port PoE/7 Port PoE+
Porta fibra	2 (condiviso)
Supporto SFPs	S2x and S3x series, S30/S35 series
Velocità SFP	100/1000

Cambia prestazioni

Cambia tessuto	7.2 Gbps
Velocità effettiva (Mpps)	5.35
Tavolo Mac	16 K
Supporto Jumbo frame	10 K

Funzioni di livello 2

Interfaccia di gestione	Web
Snooping IGMP	255 Group, Snooping v1, v2, v3
Query IGMP	Without Query supported
VLAN, QoS	30, yes

Elettrico

Budget energetico PoE	240 W
Alimentazione ridondante	No
Tipo di alimentatore	100 a 240 VCA
Consumo di energia	274 W (max.)

Fisico


Dimensioni fisiche	440 x 208 x 44 mm
Peso netto	2.8 kg
Colore	Nero
Materiale	Metallo
Tipo di montaggio	Rack 19"
Impilabile	No

Ambientale

Temperatura operativa	0 to +50°C
Temperatura di immagazzinamento	-10 to +70°C
Umidità relativa	20 to 95% noncondensing
Ambiente	Interno

Regolatorio

Conformità	CE, FCC Part 15 Class A
Standards	IEEE 802.3 10Base-T IEEE 802.3u 100Base-TX IEEE 802.3z Gigabit SX/LX IEEE 802.3ab Gigabit 1000Base-T IEEE 802.3af Power over Ethernet IEEE 802.3x Flow Control and Back Pressure IEEE 802.3ad: Port trunk with LACP IEEE 802.1d Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1p Class of Service IEEE 802.1Q VLAN Tagging IEEE 802.1x Port Authentication Network Control

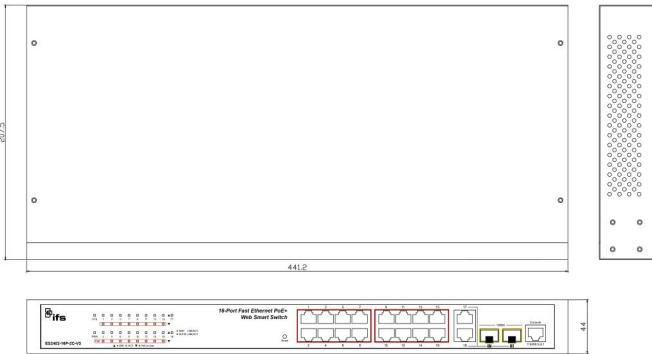

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.