

DH-HAC-ME1500B-LS

5MP HDCVI Active Deterrence Camera



* The parameters and datasheets below can only be applied to 1500-S2 series.

* In order to use the 5MP 16:9 HDCVI camera, the firmware of XVR must be upgraded to V4.001.0000001.0.R.200908 or later version.

- Max 25 fps@5MP (16:9 video output)
- CVI/CVBS/AHD/TVI switchable
- Active deterrence with warm light and siren
- Built-in PIR, 10 m/110° detecting range/angle
- 3.6 mm fixed lens (2.8 mm optional)
- Max. IR length 30 m, Smart IR
- IP67, 12 V DC



System Overview

Active Deterrence Series provides multi-dimensional system that links video with audio, information and alarm to verify potential risks. Active deterrence camera can actively warn off intruders with light and siren, alert users in real-time with alarm-over-coax, and provide visual verification with HDCVI video.

Functions

Active Deterrence

Active deterrence is to warn off intruders actively with white light and siren even before users are aware of the incidence. Once an intrusion is detected, the white light will turn on and the siren will buzz to alert the intruder. The white light can be set to normally on or flash, the content of siren is configurable.

Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables high definition video surveillance without the hassle of configuring a network.

Smart Illumination

The camera is designed with IR illumination for best lowlight performance. Smart IR is a technology to ensure brightness uniformity in B/W image under low illumination. Dahua's unique Smart IR adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object, and prevents IR LEDs from overexposing images as the object come closer to the camera.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the XVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

* Audio input is available for some models of HDCVI cameras.

Long Distance Transmission

HDCVI technology guarantees real-time transmission at long distance without any loss. It supports up to 700m transmission for 2MP/5MP/8MP HD video via coaxial cable, and up to 300m via UTP cable.* *Actual results verified by real-scene testing in Dahua's test laboratory.

Protection (IP67, wide voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normal after soaking in 1 m deep water for 30 minutes.


Wide voltage: The camera allows $\pm 30\%$ (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification						WDR		DWDR	
Camera						White Balance		Auto/Area WB	
Image Sensor		5MP				Gain Control		Auto	
Max. Resolution		1/2.7"CMOS				Noise Reduction		2D NR	
Pixel		2880 (H) × 1620 (V)				Smart IR		Yes	
Scanning System		Progressive				Mirror		Off/On	
Electronic Shutter Speed		PAL: 1/25 s–1/100,000 s NTSC: 1/30 s–1/100,000 s				Privacy Masking		Off/On (8 area, rectangle)	
S/N Ratio		0.005 Lux/F1.6, 30 IRE, 0 Lux IR on				PIR			
Min. Illumination		> 65 dB				Detection Mode		Pyroelectric infrared sensor	
Illumination Distance		30 m (98.4 ft)				Max. Detection Range		10 m (32.8 ft), 110°	
Illuminator On/Off Control		Auto				Recommended Installation Height		2.2 m–3 m (7.2 ft–9.8 ft)	
Illuminator Number		1 (IR light)				Recommended Working Temperature		–10 °C to 50 °C (14 °F to 122 °F)	
Pan/Tilt/Rotation Range		Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360°				Active Deterrence			
Lens						White Light Warning		lighting/flash; Alert Duration: 5s–60s; flash Freq: low/medium/high	
Lens Type		Fixed-focal				Sound Warning		Audio 1/2/3; Volume: high/medium/low; duration: 5 s–60 s; 110 dB	
Lens Mount		M12				Certifications			
Focal Length		2.8 mm; 3.6 mm				Certifications		CE (EN55032:2015, EN61000-3-2:2014, EN61000-3-3:2013, EN55024:2010+A1:2015, EN55035:2017, EN50130-4:2011+A1:2014) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1) IEC 62368-1:2014 (Second Edition)	
Max. Aperture		2.8 mm: F1.6 3.6 mm: F1.6							
Field of View		2.8 mm: H: 113°; V: 60°; D: 132° 3.6 mm: H: 90°; V: 48°; D: 104°							
Close Focus Distance		2.8 mm: 1.0 m 3.6 mm: 1.5 m							
DORI Distance	Lens	Detect	Observe	Recognize	Identify	Port			
	2.8 mm	61.2 m (200.8 ft)	24.5 m (80.4 ft)	12.2 m (40.0 ft)	6.1 m (20.0 ft)	Video Output		Video output choices of CVI/TVI/AHD/CVBS by one BNC port	
	3.6 mm	77.8 m (255.2 ft)	31.1 m (102.0 ft)	15.6 m (51.2 ft)	7.8 m (25.6 ft)	Power			
Video						Power Supply		DC12 V±30%	
Frame Rate		CVI: PAL: 5M@25 fps; 4M@25 fps; 1080p@25 fps; NTSC: 5M@25 fps; 4M@30 fps; 1080p@30 fps AHD: PAL: 4M@25 fps; NTSC: 4M@30 fps TVI: PAL: 4M@25 fps; NTSC: 4M@30 fps CVBS: PAL: 960H; NTSC: 960H				Power Consumption		Max 4.9 W (12 V DC, IR on)	
		5M (2880 × 1620); 4M (2560 × 1440); 1080p (1920 ×1080); 960 H (960 × 576/960 × 480)				Environment			
						Operating Temperature		–40 °C to +60 °C (–40 °F to 140 °F); < 95% (non-condensation)	
						Storage Temperature		–40 °C to +60 °C (–40 °F to 140 °F); < 95% (non-condensation)	
Day/Night		Auto switch by ICR				Protection Grade		IP67	
BLC		BLC/HLC/DWDR				Structure			
						Casing		Cover: Metal Rear: Plastic	
						Camera Dimensions		164.2 mm × 72.4 mm × 83 mm (6.46" × 2.85" × 3.27")	
						Net Weight		0.27 kg (0.60 lb)	
						Gross Weight		0.41 Kg (0.90 lb)	

Ordering Information

Type	Model	Description
SMP Camera	DH-HAC-ME1500BP-LS	5MP HDCVI Active Deterrence Fixed IR Bullet Camera, PAL
	DH-HAC-ME1500BN-LS	5MP HDCVI Active Deterrence Fixed IR Bullet Camera, NTSC
Accessories (Optional)	PFA134	IP66 Junction box
	PFA152-E	Pole Mount Bracket
	PFM800-4K	Passive HDCVI Balun
	PFM321D	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

Dimensions (mm[inch])

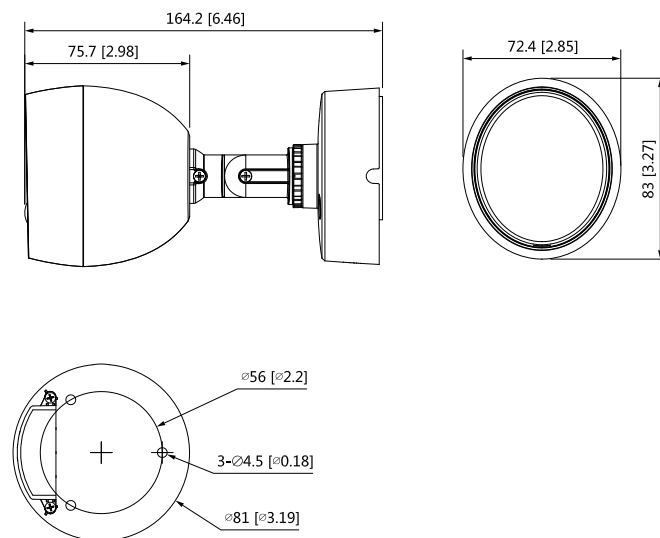

Accessories

Optional:



PFA134
IP66 Junction box



PFA152-E
Pole Mount Bracket



PFM800-4K
Passive HDCVI Balun



PFM321D
12 V 1A Power Adapter



PFM904
Integrated Mount Tester

Ceiling Mount	Junction Mount	Pole Mount(Vertical)