

KE-DBA-RECW

Intelligent addressable base accessory - recess base (white)

General


The innovative Excellence range of intelligent addressable devices offers advanced features for reliability and peace of mind. Coupled with features for ease of installation and maintenance on new fire detection systems, it's a perfect match for exceptional overall performance.

The KE-DBA-RECW is an Excellence series, recess mount base accessory. It allows Excellence series detectors to be semi-recess mounted into ceiling tiles when installed into buildings with suspended ceilings. The detector's low profile is further reduced without any increased difficulty in wiring termination.

Installation

For ease of installation, the base moulding passes through a clearance hole in the ceiling tile where it is automatically clamped between a retaining flange on the underside of the base moulding.

The standard Excellence series detector base fits snugly inside the fixture, completing the installation with the same feature set as for standard surface mount installation, including address tag mounting ability in two locations, head locking to avoid unauthorised detector removal, and device orientation features for quick, easy and secure detector placement.

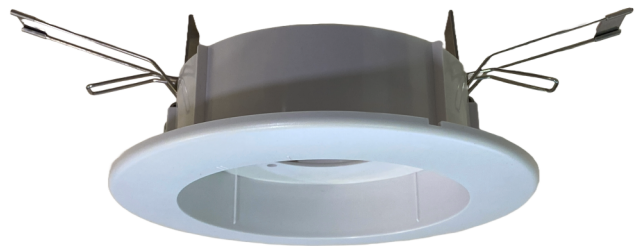

Dettagli

- Easy to install with standard tile clips avoids any drilling
- Enhances the detector low profile for aesthetically sensitive installations
- Supports standard Excellence series bases without any feature loss
- Integrated trim skirt covers any uneven hole sides
- Dual address tag locations avoids base alignment to make tags visible

KE-DBA-RECW

Intelligent addressable base accessory - recess base (white)

Specifiche tecniche

Generale

Compatibilità	Excellence series bases
---------------	-------------------------

Fisico

Dimensioni fisiche	138 x 38 mm (Ø x H)
Peso netto	110 g
Colore	Bianco (RAL 9016)
Tipo di montaggio	Montaggio a soffitto, Montaggio a incasso
Cavo di entrata	1
Materiale (scatola)	ABS stampato

Ambientale

A prova di vandalo	No
Temperatura operativa	-10 to 75°C
Umidità relativa	0 to 95% noncondensing
Ambiente	Interno
IP rating	IP42

Regolatorio

Conformità	CE, REACH, RoHS 3, WEEE
Certificazioni	CE
Ambientale	EN60529

Prodotti compatibili

Categoria	Riferimento	Descrizione
Dispositivo di rivelazione	KE-DB3010W	Base standard per rivelatori serie Excellence
Dispositivo di rivelazione	KE-DBA-TAGW	ActivSense™ Intelligent Universal Base Accessory - Address Tag (White)