

DHI-ASI1201M-MEW

Dahua Card Swiping, Password Access Standalone



Series Overview

Dahua Access Standalone is a comprehensive device that seamlessly integrates access control, readers, and other functions. With its advanced capabilities, it provides effective management and control of entrances and exits while accommodating multiple unlock methods.

Scene

Widely used in scenes such as office buildings, schools, industrial parks, communities, factories, public stadiums, commercial centers, and government buildings.

Technical Specification

System	
Main Processor	Embedded Processor
Button Type	Mechanical
Network Protocol	IPv4;UDP;P2P;IPv6;TCP
OSDP Protocol	Yes
Interoperability	ONVIF;CGI
SDK and API	Yes
Basic	
Product Type	Standalone
Buzzer	Yes
Backlight	Yes
Casing Material	PC and zinc alloy
Function	
Verification Method	Card;Password;Remote

- The front part of the case is made of zinc alloy and the back part is made of plastic.
- Supports 10,000 users, 10,000 passwords, 10,000 cards, and 100,000 records.
- Mechanical keypad with backlighting.
- Supports RS-485 communication and Wiegand communication.
- Buzzer and indicator light.
- Supports doorbell.
- Offers multiple types of alarms such as duress, tamper, intrusion, unlock timeout, and excessive use of illegal card.
- Cards can be issued to multiple types of users such as normal, VIP, patrol, guest, blocklist, other, and custom users.
- Supplies power to 1 lock (12 V, 500 mA or lower) or 1 card reader (12 V, 200 mA or lower).
- Convenient to configure through its webpage that is accessible to both computers and mobile devices.
- Supports security extension modules for access control, preventing doors from being forcefully opened.
- Online update.
- Supports TCP/IP and Wi-Fi connection, auto registration, P2P registration and DHCP.
- IP65 and IK08 rated.
- Supports surface mount.
- Compatible with multiple platforms such as SmartPSS lite, DSS PRO and DMSS.

Period List	128 periods
Holiday Period	128 periods
Network Update	Yes
First User Unlock	Yes
Remote Verification	Yes
Restricted List/Trusted List	Yes
Peripheral Card Reader	Includes the 1-channel RS-485 card reader and 1-channel Wiegand card reader. You can easily switch between the two with just the flip of the switch.
Issuing Card by Master Card	Yes
Multi-user Authentication	Yes
Real-time Monitoring	Yes
Multi-factor Authentication	Yes
Web Configuration	Yes


Dahua Access Standalone | DHI-ASI1201M-MEW

Auto Registration	Yes
RFID	
Card Type	ID card;M1 Card;Desfire Card (EV3, Compatible with Dahua card by default)
Modulation Type	AM
Frequency Range	13.56 MHz and 125 kHz
Max. Transmission Power	125 kHz: 66 dBuA/m@10 m 13.56 MHz: 42 dBuA/m@10 m
Network	
Wi-Fi	Yes
Wireless Standard	IEEE 802.11b, 802.11g and 802.11n
Wireless Frequency Range	2,400–2,483.5 MHz
Max. Transmission Power	≤20 dBm@2,400–2,483.5 MHz
Wireless Security Encryption	WPA/WPA2 and WPA-PSK/WPA2-PSK
Performance	
IC Card Encryption	Yes
Card Reading Distance	0 mm–30 mm (0"–1.18")
User	
User (Card) Type	Normal, VIP, patrol, guest, blacklist, and other users, custom user 1 and custom user 2
Capacity	
User Capacity	10,000
Card Capacity	10,000
Password Capacity	10,000
Record Capacity	100,000
Port	
RS-485	1 port that can also be used by the Wiegand card reader
Wiegand	1 port that can also be used by the RS-485 card reader. (Wiegand input is 26, 34 or 66 bits self-adaptive. Wiegand output is 34 bits by default, and can be configured to 26 or 66 bits.)
Network Port	1 × RJ-45 10/100 Mbps self-adaptive Ethernet port
Alarm Input	2 channels
Alarm Output	1 channel that can also be used by the doorbell output
Alarm Linkage	Yes
Doorbell	1 channel that can also be used by the alarm output
Exit Button	1 channel
Door Status Detection	1 channel
Lock Control	1 channel
Power Output Port	1 channel (12 V, 0.5 A)
Alarm	
Anti-pass Back	Yes
Tamper Alarm	Yes

Duress Alarm	Yes
Door Sensor Timeout	Yes
Intrusion	Yes
Illegal Card Exceeding Threshold	Yes
General	
Power Adapter	Optional
Power Supply	12 VDC, 1.5 A
Protection	IP65 IK08
Power Consumption	≤18 W
Product Dimensions	169.0 mm × 57.5 mm × 33.3 mm (6.65" × 2.26" × 1.31") (H × W × D)
Packaging Dimensions	219 mm × 111 mm × 98 mm (8.62" × 4.37" × 3.86") (H × W × D)
Transport Package Dimensions	585 mm × 470 mm × 320 mm (23.03" × 18.50" × 12.60") (H × W × D)
Operating Temperature	–30 °C to +60 °C (–22 °F to +140 °F)
Operating Humidity	5%–95% (RH), non-condensing
Operating Environment	Outdoor
Gross Weight	0.65 kg (1.43 lb)
Accessory	The bracket of wall mount is included.
Installation	Wall Mount
Certifications	CE
Storage Temperature	–20 °C to +70 °C (–4 °F to + 158 °F)
Storage Humidity	30%–75% (RH), non-condensing

Ordering Information		
Type	Model	Description
Access Standalone	DHI-ASI1201M-MEW	Dahua Card Swiping, Password Access Standalone

Installation

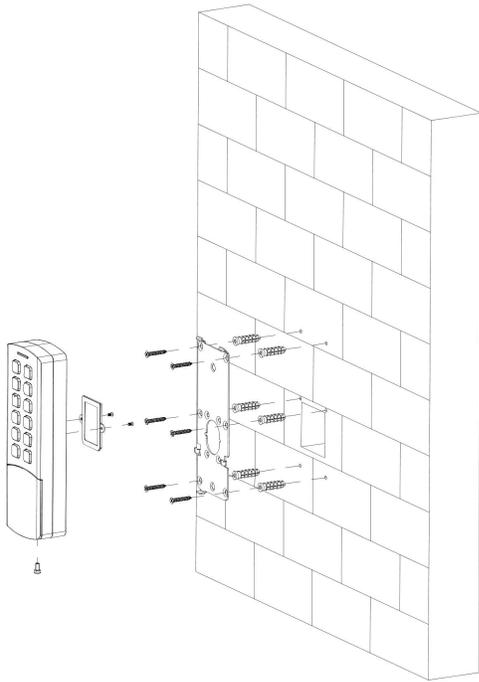

Dimensions (mm[inch])

