
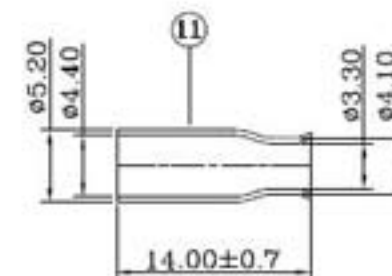




ROHS Compliant

408060

REVISIONS


RevNo	Description	Date	Revision	Mender
1	SHELL MATERIAL:ZINC	2012/09/06	A2	CKQ
2	Change size ø3.0 to ø3.30,ø3.80 to ø4.10	2012/12/21	A3	CKQ
3	Change ferrule	2013/02/26	A4	CKQ

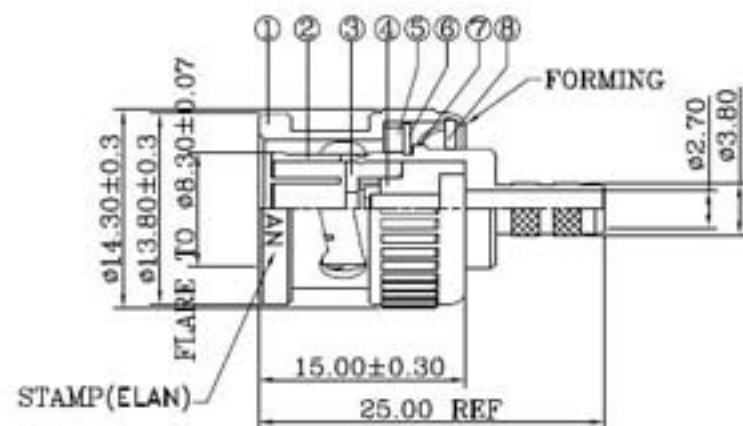

NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1.BRASS PER QQ-B-626
- 2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 3.NICKEL PL.200 MIN. THICK OVER COPPER STRIKE
- 4.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
- 5.JIS H 3250,C 2700

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .178"
- 2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

RECOMMENDED
CABLE STRIPPING DIM'S

11	FERRULE	NOTE 5	1	NOTE 2
10	INSULATOR	POM	1	NATURAL
9	CONTACT PIN	NOTE 1	1	NOTE 4
8	WASHER	IRON	1	NOTE 2
7	SPRING	SK5	1	NOTE 3
6	RETAINER RING	65Mn	1	NOTE 2
5	GASKET	RUBBER	1	RED
4	INSULATOR	POM	1	NATURAL
3	INSULATOR	POM	1	NATURAL
2	BODY	NOTE 1	1	NOTE 2
1	SHELL	ZINC	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

ELAN
CAVI E BATTERIE

DRAWING NO.	UNITS	MM
MODEL NO.	SCALE	FIT
PART NO.	EDITION	A1
CAD FILE		

TITLE
BNC CRIMP PLUG 75 OHMS
(FOR Micro Coax ELAN)

DESIGNED	Ckq
DRAWING	Ckq
CHECKED	
APPROVED	
PUBLISH DATE	2012/06/18
3RD ANGLE	