

TDA1400-4

Alarm dialler communicating via Cellular with 4G support

Introduction

TDA14xx-4 Series offers cost effective Alarm over IP (AoIP) for the commercial and residential sectors.

All TDA14xx-4 Series diallers are certified as suitable for all Grade 4 systems with an Alarm Transmission System (ATS) configuration up to SP6 for single path, or ATS configuration DP4 for dual path with this TDA1400-4.

TDA14xx-4 Series is based on the successful TDA14xxNG Series range of AoIP diallers with the same hardware and software used in all diallers; with the same level of security and features provided to military, governments, banks and commercial industry markets.

TDA14xx-4 Series offers a touch screen as standard for configuration, local alerts, and allows diagnostic and tests to be performed by the engineer.


Polling and alarm transmission are performed by the TDA1400-4 via 2/3/4G communication to the monitoring center using the IRIS Secure Apps monitoring software.

All data transferred for polling and alarms is encrypted using the same security key used for authentication.

Communications with the receiver (Polling Engine) uses EN 50136-2 pass-through mode.

Package contents

- Dialler board
- 2/3/4G antenna
- Stylus for touch screen navigation
- RJ11 cable
- 18 k Ω sense resistor for dial capture tamper detection

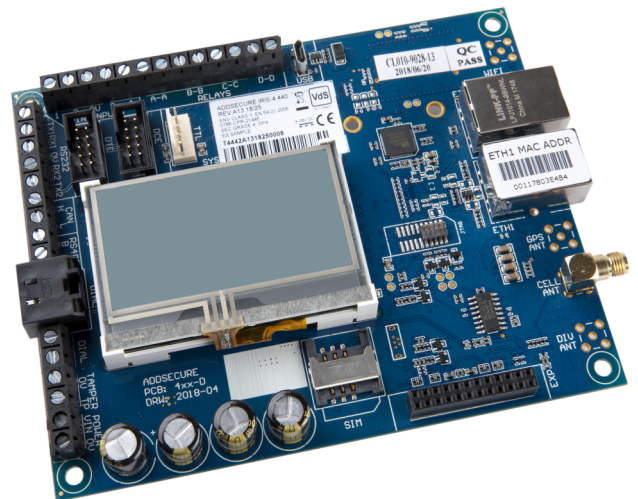

TDA1400-4

Alarm dialler communicating via Cellular with 4G support

Technical specifications

General

Linee prodotto	Advisor Advanced, ATS Master
----------------	------------------------------

Network

Tipo di comunicatore	2G, 3G, 4G
Frequenza GSM	Penta band LTE (4G) 800/900/1800 MHz 2100/2600 MHz Dual band UMTS (3G) 900/2100 MHz Dual band GSM (2G) 900/1800 MHz

Reporting

Protocolli di segnalazione	SIA
Supported receivers	IRIS Secure Apps (Chiron)

Interfaces

Ethernet	---
Antenna	Si, incluso

Input/Output

Ingressi	4 standard pins and 12 with add-on daughter board
----------	---

Electrical

Operating voltage	9 to 28 V DC
Consumo attuale	153mA at 12 VDC

Physical

Physical dimensions	15 cm x 11 cm
Net weight	300 g
Shipping weight	500 g

Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% max., non-condensing

Standards & regulation

Conformità	CE
Certificazioni	EN50131, EN54-21

