

EST-S206B_BL

Diffusore acustico da soffitto per installazione rapida a plafone Versione Nera

Overview

Ceiling mounted fire alarm EST-S206B loudspeaker is designed for operations at high acoustic levels and the highest reduction in power supply. Actual wide band high efficiency ensures the best understanding of verbal messages. Its parameters have been carefully selected to comply with suspended ceiling applications, both at standard and considerably elevated ceiling-to-floor distance.

Thanks to the most advanced technologies EST-S206B loudspeaker combines excellent acoustic parameters and high aesthetics with resistance to mechanical damages. It is distinguished by easy and quick installation.

Quality standards and audio characteristics have been confirmed through multiple tests and trials employing such facilities as e.g. echo-proof chamber, resistance and integrity testing equipment.

The EST-S206B loudspeaker ensure a balanced sound which is extremely important in emission of highly understandable speech.

The EST-S206B loudspeaker is noticeable thanks to its elegant looks. The loudspeaker part which becomes visible after the installation is covered by a common and aesthetic white paint coat (RAL 9003) – optionally available other colours (RAL palette).

EST-S206B is equipped with a standardized fire dome made of soft steel and supplied with two cable penetrations with rubber glands. Special jig for sling assembling facilitates quick installation. Ceramic blocks and fireproof wiring coupled with temperature limit fuse are located inside fire dome.

The individual power rating is selected by means of connection with applicable transformer branch.

EST-S206B loudspeaker equipped with fire dome and thermal protections entirely comply with EN 54-24 Standards. In order to ensure 100% consistency with the highest quality standards, we test our loudspeaker following the most meticulous procedures that warrant high parameters of sound emission, safety, and reliability.

In spite of the fact our loudspeaker is designed for the highest reliability under fire conditions, their acoustic parameters and attractive low prices make them successful in any and all public address systems.



Dettagli

- Compliance with EN 54-24
- Certificate of Conformity: 1438-CPR-0605
- Compliance with BS5839-8 standard (Thermal protection)
- The highest level of verbal communication understanding
- Elegant looks
- 6 W transformer allowing a precise selection of loudspeaker output power
- 100% protection of line from breaks and short-circuits

EST-S206B_BL

Diffusore acustico da soffitto per installazione rapida a plafone Versione Nera

Specifiche tecniche

Elettrico

Consumo di energia	6 W
--------------------	-----

Fisico

Dimensioni fisiche	199 x 115 mm (Ø x H)
--------------------	----------------------

Peso netto	1.1 kg
------------	--------

Colore	Nero
--------	------

Tipo di montaggio	Morsetto a molla
-------------------	------------------

Posizione di montaggio	Soffitto
------------------------	----------

Materiale di alloggiamento	Acciaio
----------------------------	---------

Ambientale

Temperatura operativa	-10 to +55°C
-----------------------	--------------

IP rating	IP32C
-----------	-------

Regolatorio

Standards	EN54-24
-----------	---------

Electrical

Tappings 100 V line according to EN 54-24, W	6 / 3 / 1.5 / 0.75
--	--------------------

Tappings 70 V line, W	3 / 1.5 / 0.75 / 0.375
-----------------------	------------------------

Transformer impedance, Ω 100 V	1667 / 3333 / 6667 / 13333
---------------------------------------	----------------------------

Driver impedance	8 Ω
------------------	------------

Effective frequency range	120 to 20000 Hz
---------------------------	-----------------

Sensitivity at 4 m, 1 W	81 dB
-------------------------	-------

SPL at 4 m, Rated power	88 dB
-------------------------	-------

SPL at 1 m, 1 W, Test signal bandwidth	93 dB 300 Hz - 6 kHz
--	-------------------------

SPL at 1 m, Rated power, Test signal bandwidth	101 dB 300 Hz - 6 kHz
--	--------------------------

Dispersion at 500 Hz / 1 kHz / 2 kHz / 4 kHz, [°]	180 / 180 / 95 / 70
---	---------------------


Environmental

Environmental type / IP	A / IP21C
-------------------------	-----------

Rating according to EN 54-24	
------------------------------	--

Physical

Cut-out	Ø 175 mm
---------	----------

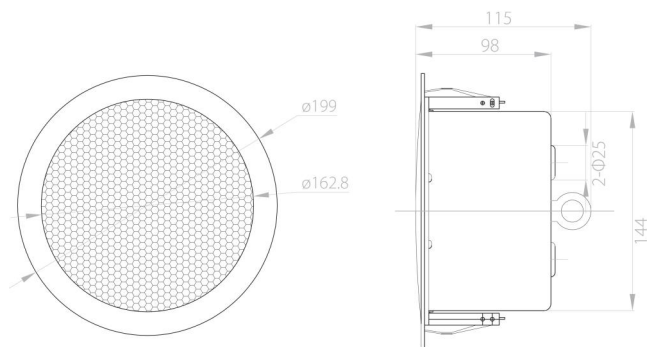

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 19 December 2024 - 15:22